



Wall mounted unit Air Conditioning Technical Data FTXP-N



FTXP20N5V1B
FTXP25N5V1B
FTXP35N5V1B
FTXP50N2V1B
FTXP60N2V1B
FTXP71N2V1B

TABLE OF CONTENTS

FTXP-N

1	Features	4
	FTXP-N	4
2	Specifications	5
3	Options	7
4	Dimensional drawings	9
5	Centre of gravity	10
6	Piping diagrams	12
7	Wiring diagrams	15
	Wiring Diagrams - Three Phase	15
8	Sound data	16
	Sound Power Spectrum	16
	Sound Pressure Spectrum	19

1 Features

1 - 1 FTXP-N

Discreet wall mounted unit providing high efficiency and comfort

1

- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Seasonal efficiency values up to A++ in cooling and heating
- › Space saving contemporary wall mounted design



 Onecta app	 Econo mode	 Energy saving during standby mode	 Night set mode	 Fan only	 Comfort mode	 Powerful mode	 Auto cooling-heating changeover	 Indoor unit silent operation
 3-D air flow	 Vertical auto swing	 Horizontal auto swing	 Auto fan speed	 Fan speed steps (5 steps)	 Dry programme	 Silver allergen removal and air purifying filter	 Practically inaudible	 Titanium apatite deodorising filter
 Air filter	 24 hour timer	 Infrared remote control	 Auto-restart	 Self diagnosis				

2 Specifications

2 - 1 Specifications

Technical specifications				FTXP20N	FTXP25N	FTXP35N	FTXP50N	FTXP60N	FTXP71N	
Power input	Cooling	Nom.	kW	0.019	0.020	0.032	0.029	0.032		
	Heating	Nom.	kW	0.023		0.032		0.035		
Casing	Colour			White						
Dimensions	Unit	Height	mm	286			295			
		Width	mm	770			990			
		Depth	mm	225			263			
	Packed unit	Height	mm	305			368			
		Width	mm	830			1,080			
		Depth	mm	360			383			
Weight	Unit		kg	8.50		9.00		13.5		
	Packed unit		kg	10.5		11.0		16		
Packing	Weight		kg	2.0			2.5			
Heat exchanger	Length		mm	610			820			
	Rows	Quantity					2			
	Fin pitch		mm	1.40			1.4			
	Stages	Quantity					18			
	Passes	Quantity		2.0			6			
	Tube type			ø5 Hi-XB						
	Fin		Type	ML fin (Multi louver)						
	Heat exchanger 2	Length		mm	-		600		810	
Rows		Quantity		-				1		
Fin pitch		mm	-		1.40		1.4			
Stages		Quantity		-		8				
Heat exchanger 3	Length		mm	-			810			
	Rows	Quantity		-			1			
	Fin pitch		mm	-			1.4			
	Stages	Quantity		-			4			
Fan	Type			Cross flow fan						
	Quantity			1						
Air flow rate	Cooling	High	m ³ /min	9.5	9.7	11.5	16.3	-		
			cfm	335.1	343.3	406.1	575	592		
	Medium	m ³ /min	7.4	7.7	8.3	14.0	14.4			
		cfm	262.0	270.2	293.1	493	506			
	Low	m ³ /min	5.6	5.8	6.3	11.5	11.8			
		cfm	198.1	205.9	222.5	401	417			
	Silent operation			m ³ /min	4.2		4.5	8.3	9.2	10.1
	Heating	High	m ³ /min	10.4	11.5	17.3	17.9			
cfm			368.0	406.1	618	632				
Medium		m ³ /min	8.1	9.0	14.4	15.3				
		cfm	286.0	317.8	510	540				
Low		m ³ /min	6.2	6.4	7.0	11.8	12.4			
		cfm	217.9	226.0	247.2	421	438			
Silent operation			m ³ /min	5.2		5.3	10.4	11.0		
cfm			182.2		287.0	370	387			
Fan motor	Model			DFD03C1VB			MM9E17S21VA			
	Speed			5 + silent, + auto						
Cooling	High	rpm	1,000	1,020	1,160	1,040	1,070			
		rpm	820	840	890	920	940			
		rpm	660	680	720	790	810			
		rpm	530		570	600	650	700		
	Medium	rpm	1,080	1,160	1,100	1,140	1,170			
		rpm	880		950	940	990			
		rpm	710	730	780	810	840			
		rpm	620		640	730	760			
Output			Rated		W		46			
Sound power level	Cooling		dB(A)	55		58	59.0	60.0	62.0	
	Heating		dB(A)	55		58	61.0	62.0		
Sound pressure level	Cooling	High	dB(A)	39	40	43	43.0	45.0	46.0	
			dB(A)	33		34	39.0	41.0	42.0	
		Low	dB(A)	25	26	27	34.0	36.0	37.0	
			dB(A)	19		20	27.0	30.0	32.0	
	Heating	High	dB(A)	39	40		42.0	44.0	45.0	
			dB(A)	34		35	38.0	40.0	41.0	
		Low	dB(A)	28	29		33.0	35.0	36.0	
			dB(A)	21		30.0		32.0	33.0	
Piping connections	Liquid	OD	mm	6			6.4			
	Gas	OD	mm	9.50			12.7			
	Drain			18						
Heat insulation			Both liquid and gas pipes							
Air filter	Type			Removable / washable						
Air direction control			Left, right, up and downwards							

2 Specifications

2 - 1 Specifications

2

Technical specifications		FTXP20N	FTXP25N	FTXP35N	FTXP50N	FTXP60N	FTXP71N
Temperature control		Microcomputer control					
Control systems	Infrared remote control	ARC480A78			ARC480A53		
	Wired remote control	BRC944B2 / BRC073A1			-		

Standard accessories: Installation manual;Quantity: 1;

Standard accessories: Operation manual;Quantity: 1;

Standard accessories: Infrared remote control;Quantity: 1;

Standard accessories: AAA dry-cell batteries;Quantity: 2;

Standard accessories: Remote control holder;Quantity: 1;

Standard accessories: Mounting plate;Quantity: 1;

Standard accessories: Titanium apatite deodorizing filter;Quantity: 1;

Standard accessories: Silver particle filter;Quantity: 1;

Standard accessories: Indoor unit fixing screws;Quantity: 2;

Standard accessories: General safety precautions;Quantity: 1;

Standard accessories: WLAN adapter kit;Quantity: 1;

Electrical specifications				FTXP20N	FTXP25N	FTXP35N	FTXP50N	FTXP60N	FTXP71N	
Power supply	Name			-			V1			
	Phase						1~			
	Frequency	Hz						50		
	Voltage	V						220-240		
Current	Nominal running current (RLA) - 50Hz	Heating	A	-			0.34	0.37	0.40	
	Nominal running current (RLA)	Cooling	A	-			0.32	0.34		

Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 5m; level difference: 0m |

Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m (horizontal) |

See separate drawing for electrical data

3 Options

3 - 1 Options

FTXP20-35N

Option kit	Product name	Remark	Applicable models																	
			FTXP20N5V1B	FTXP25N5V1B	FTXP35N5V1B	ATXP20N5V1B	ATXP25N5V1B	ATXP35N5V1B												
			Class	Casing	Factory															
			20	BMS-R32	DTAS	25	BMS-R32	DTAS	35	BMS-R32	DTAS	20	BMS-R32	DTAS	25	BMS-R32	DTAS	35	BMS-R32	DTAS
Wi-Fi adaptor for smartphones (Onecta App Adapter "Cartridge")	BRP069C47	①																		
Wired remote control	BRC073A1	②	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wired remote control	BRC944B2																			
Extension cord for wired remote control (-3-m)	BRCW901A03		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Extension cord for wired remote control (-5-m)	BRCW901A08		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Interface adaptor for wired remote control	EKRP067A41	③	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Interface adaptor for wired remote control	KRP980B1	③	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Interface adaptor for wired remote control	EKRP980B2																			
Centralised control board (up to ·5· rooms)	KRC72A																			
Wiring adaptor (normal open contact - normal open pulse contact)	KRP413AB1S		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Interlligent Touch Manager	DCM601A5A	② ④	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Interface adaptor for DIII-NET	KRP928BB2S	②	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Central remote control	DCS302CA51	② ④	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Unified ON/OFF controller	DCS301BA51/61	② ④	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Schedule timer	DST301BA51/61	② ④	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Titanium apatite deodorising filter without frame	KAF971A42																			
Titanium apatite deodorising filter without frame	KAF952B42																			
Titanium apatite deodorising filter without frame	KAF970A46	⑤	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Honeycomb deodorising and air-purifying filter without frame	KAF968A42																			
Honeycomb deodorising filter with frame	KAZ917B41																			
Honeycomb deodorising filter without frame	KAZ917B42																			
Air-purifying filter with frame	KAF925B41																			
Honeycomb deodorising and air-purifying filter with frame	KAF046A41																			
Anti-theft protection for remote control	KKF910AA4																			
Anti-theft protection for remote control	KKF917AA4																			
Anti-theft protection for remote control	KKF936A4		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Installation frame for floor-standing units	BKS028A4																			
Optional remote control BRC480A54 for heating-only indoor units	BRC54A		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Silver particle filter (Ag-ion) with frame	KAF057A41		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Modbus interface	EKMBDXA7V1	② ④	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Modbus Gateway	RTD-RA	② ④	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
KNX interface	KLIC-DD	② ④	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Notes

- ① Standard equipped
- ② To connect this option to the indoor unit, therefore Interface adaptor .KRP980B1. is required.
- ③ This option feature a(n) .S21. connector .EKRP067A41. is only .S21. PCB. .KRP980B1. is S21 PCB and adaptor casing - however adaptor plastic casing are not required for installation to the unit.
- ④ This option can not operate together with the wireless LAN functionality. When connecting this option to the indoor unit ,turn off the indoor unit's wireless LAN functionality.
- ⑤ Standard accessory

3D144376

3 Options

3 - 1 Options

3

FTXP50-71N

Option kit	Product name	Remark	Applicable models			Casing		Factory	
			FTXP50N2V1B	FTXP60N2V1B	FTXP71N2V1B	50	71	DICz	DICz
Wired remote control	BRC073A1		✓	✓	✓				
Wired remote control	BRC944B2					BML	BML	DICz	DICz
Extension cord for wired remote control (-3-m)	BRCW901A03		✓	✓	✓				
Extension cord for wired remote control (-5-m)	BRCW901A08		✓	✓	✓				
Interface adaptor for wired remote control	KRP980B1								
Interface adaptor for wired remote control	EKRP067A41								
Interface adaptor for wired remote control	EKRP980B2								
Centralised control board (up to -5- rooms)	KRC72A								
Wiring adaptor (normal open contact - normal open pulse contact)	KRP413AB1S								
Wi-Fi adaptor for smartphones	BRP069B41	④ ⑤							
Wi-Fi adaptor for smartphones	BRP069B42	⑤							
Wi-Fi adaptor for smartphones	BRP069B43	⑤							
Wi-Fi adaptor for smartphones	BRP069A44	⑥							
Wi-Fi adaptor for smartphones	BRP069B45	⑤							
Interface adaptor for DIII-NET	KRP928BB2S		✓	✓	✓				
Central remote control	DCS302CA51								
Unified ON/OFF controller	DCS301BA51								
Schedule timer	DST301BA51								
Titanium apatite deodorising filter without frame	KAF971A42	①							
Titanium apatite deodorising filter without frame	KAF952B42	③							
Titanium apatite deodorising filter without frame	KAF970A46	②	✓	✓	✓				
Honeycomb deodorising and air-purifying filter without frame	KAF968A42								
Honeycomb deodorising filter with frame	KAZ917B41								
Honeycomb deodorising filter without frame	KAZ917B42								
Air-purifying filter with frame	KAF925B41								
Honeycomb deodorising and air-purifying filter with frame	KAF046A41								
Anti-theft protection for remote control	KKF910AA4								
Anti-theft protection for remote control	KKF917AA4								
Anti-theft protection for remote control	KKF936A4		✓	✓	✓				
Installation frame for floor-standing units	BKS028A4								
Optional remote control BRC480A54 for heating-only indoor units	BRC54A	⑦	✓	✓	✓				

LEGEND

- ① Three-dimensional knitted fabric (-42x275-mm) + activated charcoal net
- ② Three-dimensional knitted fabric (-42x255-mm) + activated charcoal net
- ③ Corrugated fiberboard (-42x275-mm)
- ④ Without connection cable
- ⑤ Option -BRP069A**, was replaced by option -BRP069B**.
- ⑥ This option is no longer produced.
- ⑦ Only for France

NOTES

- 1. R32 models

3D095173T


4 Dimensional drawings

4 - 1 Dimensional Drawings


ATXP-N FTXP20-35N

THE " → " MARK SHOWS THE PIPING DIRECTION.

REQUIRED SPACE FOR SERVICE AND VENTILATION

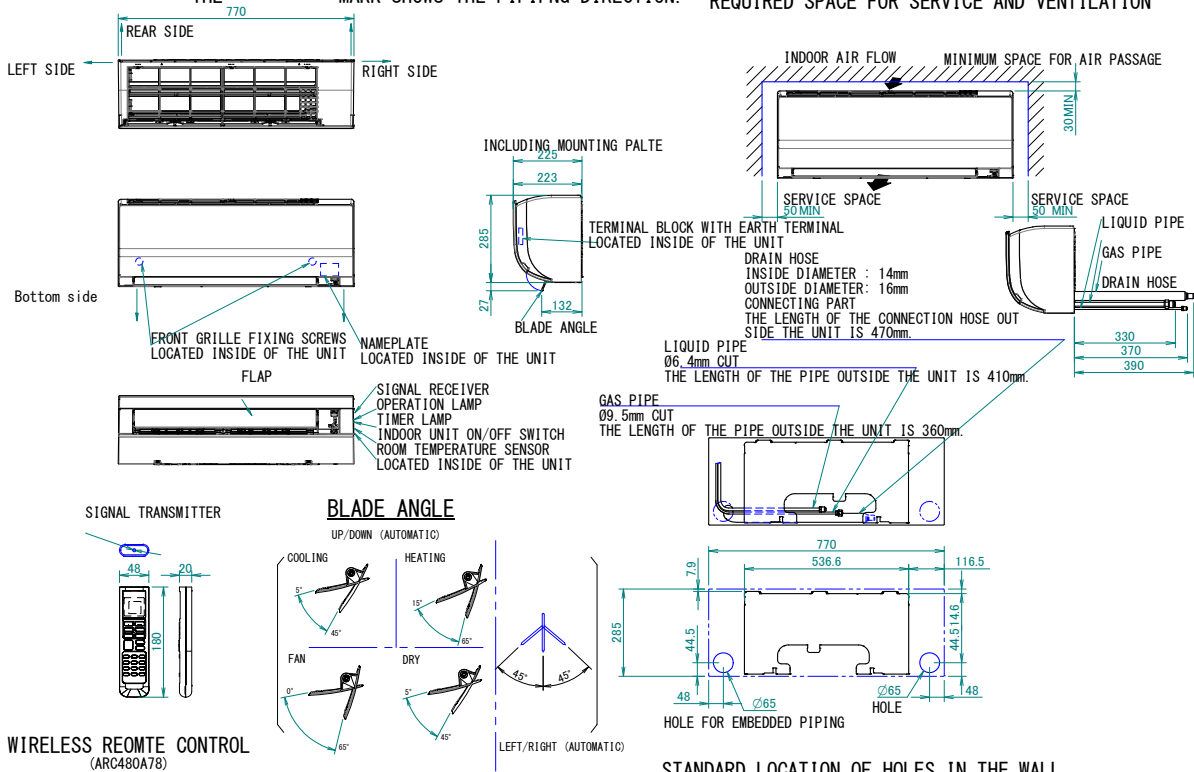

FTXP50-71N


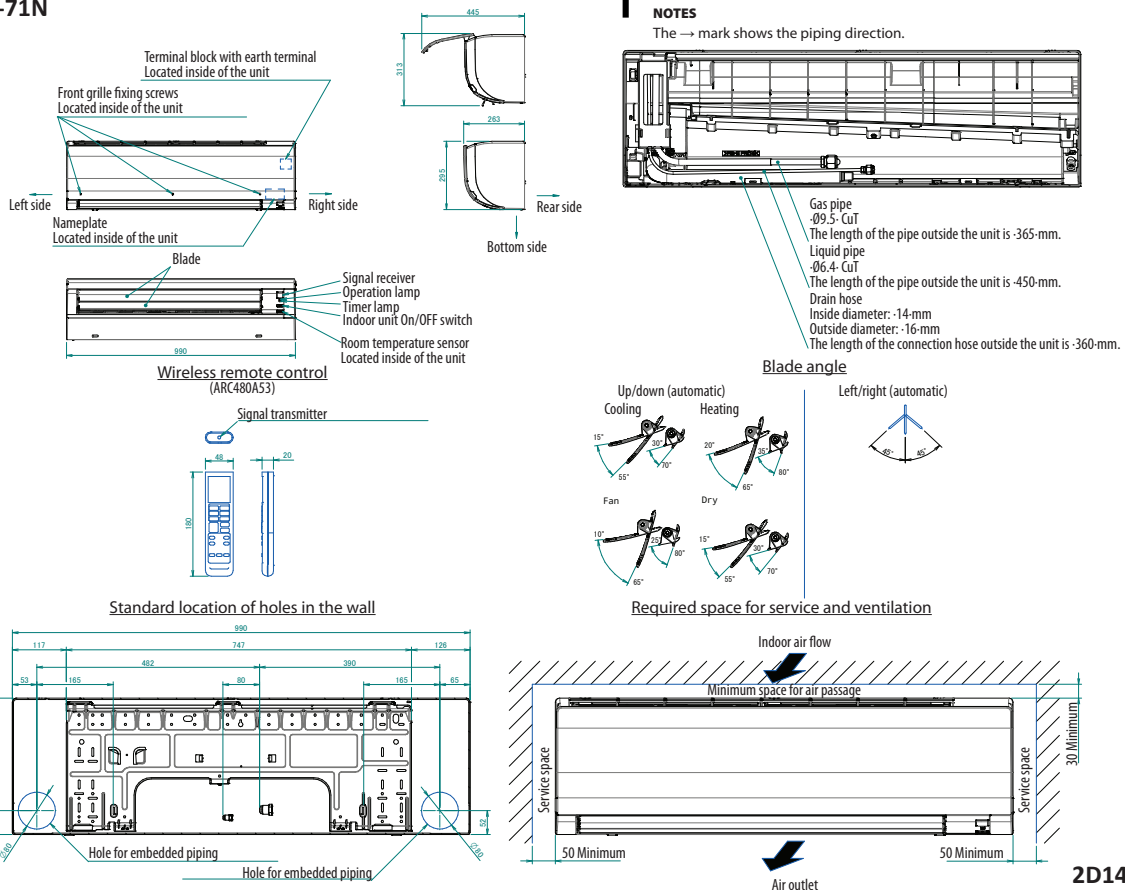


5 Centre of gravity

5 - 1 Centre of Gravity

5

FTXP20-35N

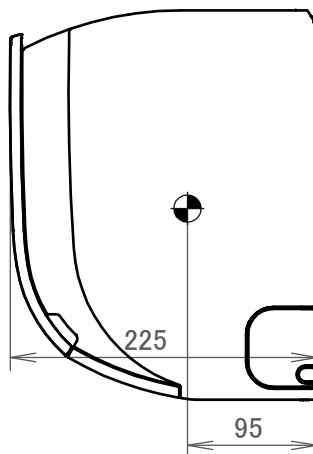
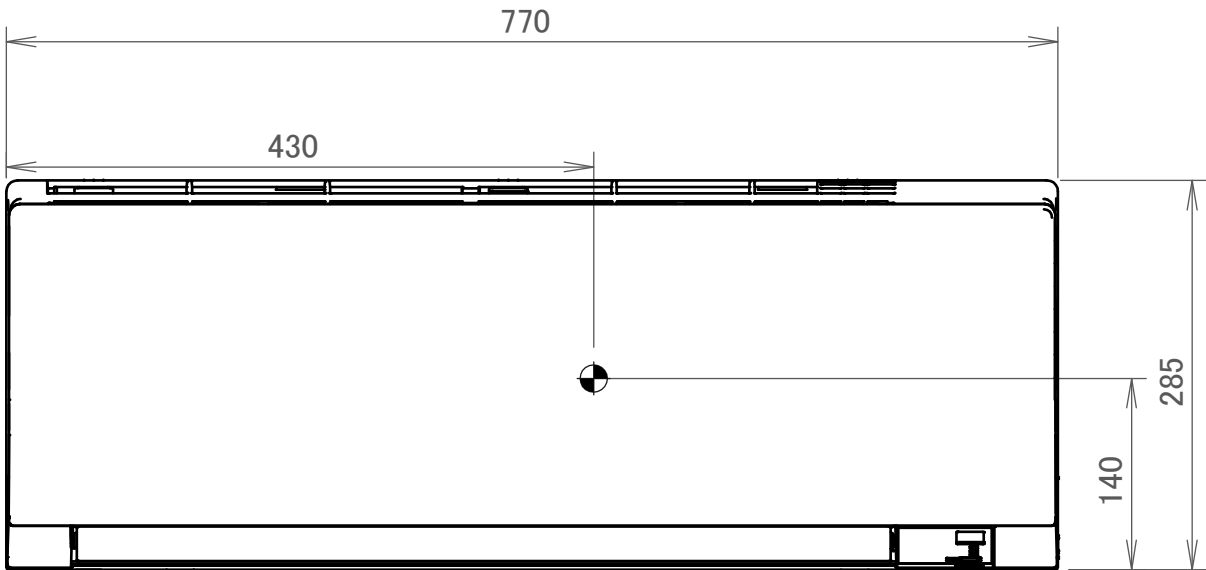


4D094235D

5 Centre of gravity

5 - 1 Centre of Gravity

FTXP50-71N

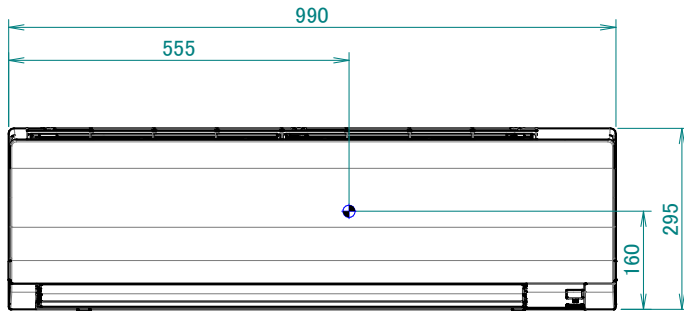


4D142308

6 Piping diagrams

6 - 1 Piping Diagrams

6

FTXP20-25N

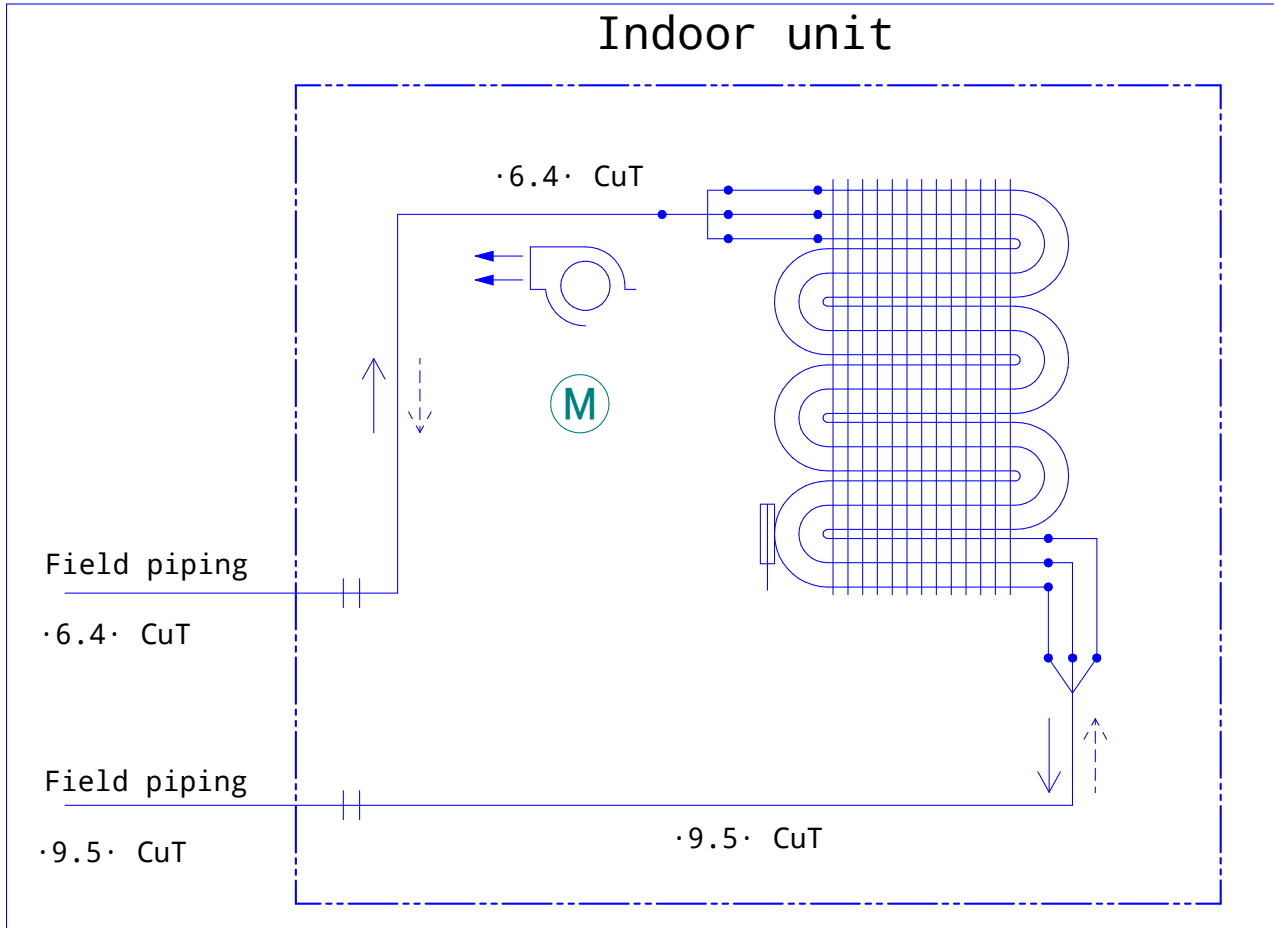



Refrigerant flow


→ Cooling

- - - -> Heating

 Crossflow fan

 Fan motor


 Thermistor (heat exchanger)

 Heat exchanger

4D139891

6 Piping diagrams

6 - 1 Piping Diagrams

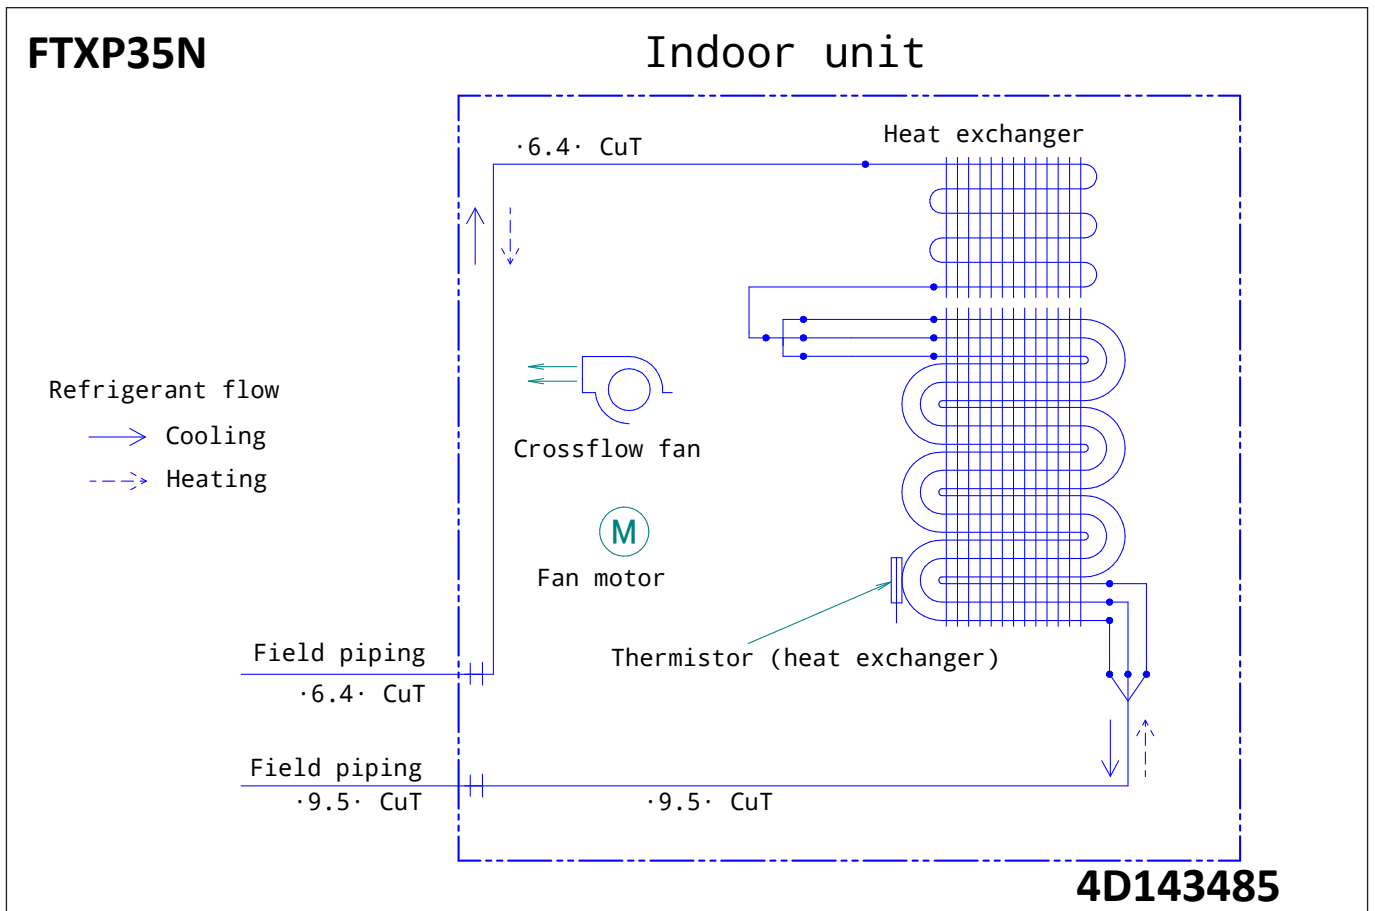


6 Piping diagrams

6 - 1 Piping Diagrams

6

FTXP50-71N

Indoor unit

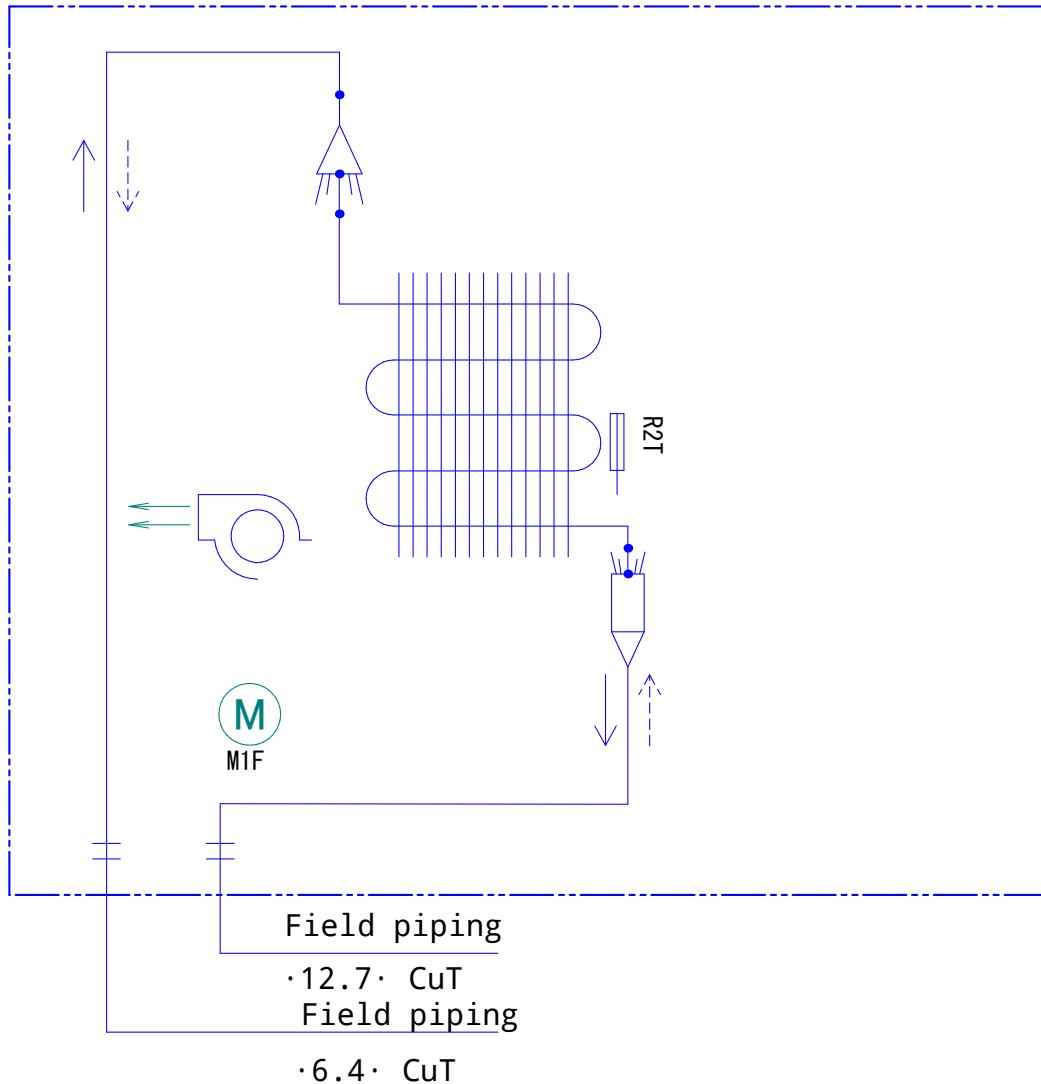

Refrigerant flow

→ Cooling

- - - - -> Heating

Legend



Fan motor



Distributor



Heat exchanger



Crossflow fan



Thermistor (heat exchanger)

4D101332E

7 Wiring diagrams

7 - 1 Wiring Diagrams - Three Phase

FTXP20-35N **Wiring diagram**

Field wiring: [Black and white dashed line pattern]

CAUTION
When the main power is turned off and then back on again, operation will resume automatically.

NOTES
1. Size : length 70 x width 120
2. Unless otherwise specified refer to purchasing specification AS303002.

A1~4P	Printed circuit board
BZ	Buzzer
FG	Frame ground
FU	Fuse
HK1~HK2	Harness
IPM200	Intelligent power module
LED1, LED2	Light-emitting diode
M1F	Fan motor
M1S, M2S	Swing motor
MR10	Magnetic relay
R1T, R2T	Thermistor
S1-S800	Connector
S1W	Operation switch
V1	Varistor
X1M	Terminal strip
Z1C	Ferrite core
⊕	Protective earth
⊥	Earth
Ⓡ	Rectifier

3D142356

FTXP50-71N **Wiring diagram**

Wire colors:
BLK : black
RED : red
BLU : blue
WHT : white
GRN : green
YLW : yellow
ORG : orange

Field wiring: [Black and white dashed line pattern]

CAUTION
When the main power is turned off and then back on again, operation will resume automatically.

FG, HE, S6 S900	Connector
F1U (FU1)	Fuse
T1R (L301)	Transformer
M1F	Fan motor
M1S, M2S	Swing motor
K1R (MR10)	Magnetic relay
A1P~A4P	Printed circuit board
R1T, R2T	Thermistor
BS1 (S1W)	Operation switch
R2V (V2)	Varistor
X1M	Terminal strip
Z1C, Z2C	Ferrite core
IPM201~203	Intelligent power module
H1P, H2P (LED 1~2)	Pilot lamp
⊕	Protective earth
V1R (DB301)	Diode bridge
H10 (BZ)	Buzzer
C101~302	Capacitor
SR (WLU)	Signal receiver

3D142306A


8 Sound data

8 - 1 Sound Power Spectrum


8

FTXP20-25N

Cooling mode

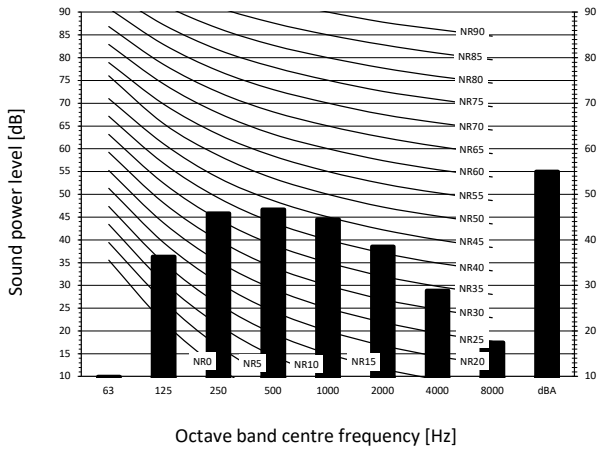

Heating mode

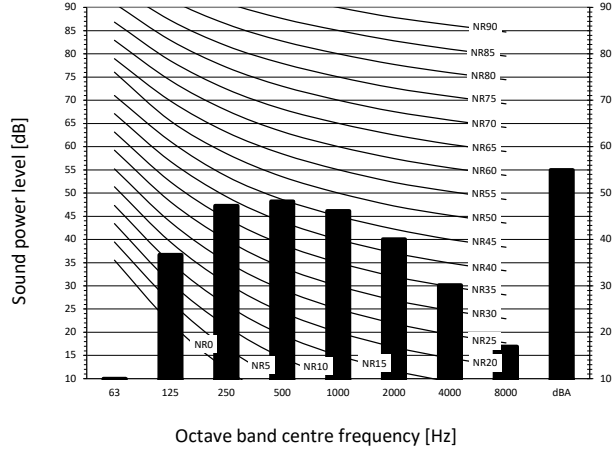

Fan speed: High


Notes

1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic power 0 dB = 20 μPa
3. Measured according to ISO 3744


4D145078

FTXP35N

Cooling mode

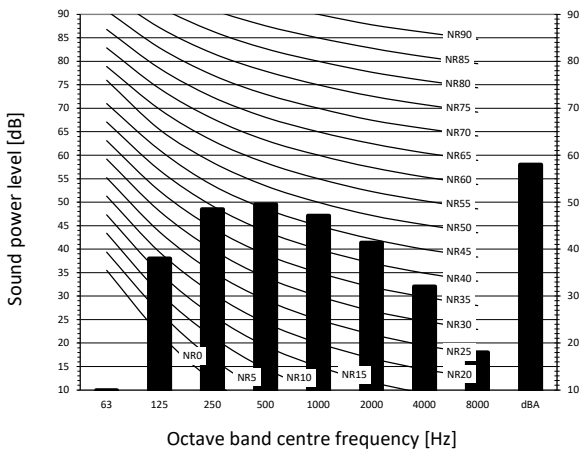

Heating mode

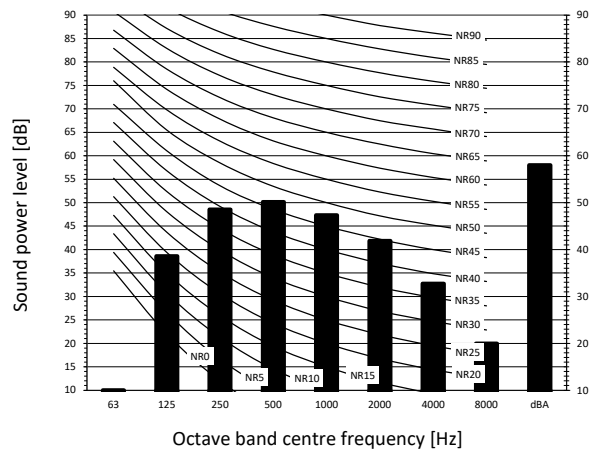

Fan speed: High

Notes

1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic power 0 dB = 20 μPa
3. Measured according to ISO 3744


4D145080

8 Sound data


8 - 1 Sound Power Spectrum

FTXP50N

Cooling mode

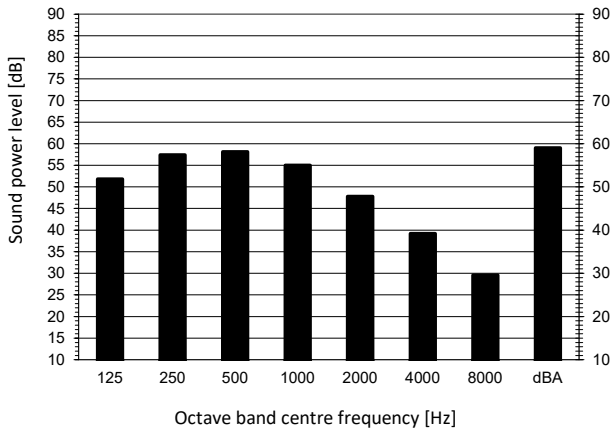

Heating mode

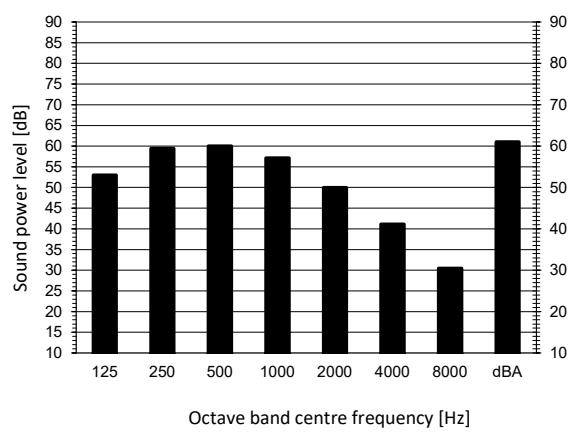

Fan speed: High


Notes

1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic power 0 dB = $\cdot 10E-6 \cdot \mu W$
3. Measured according to ISO 3744


4D142738

FTXP60N

Cooling mode

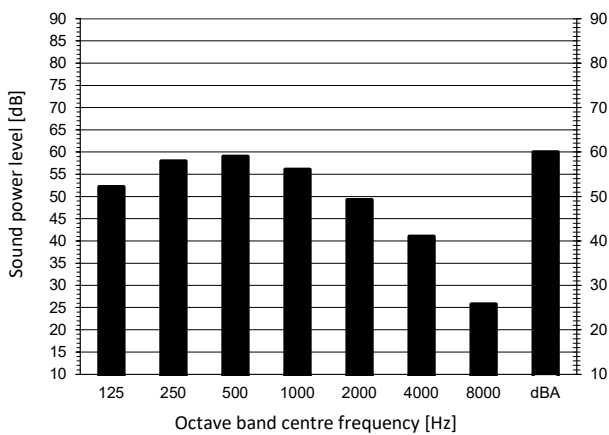

Heating mode

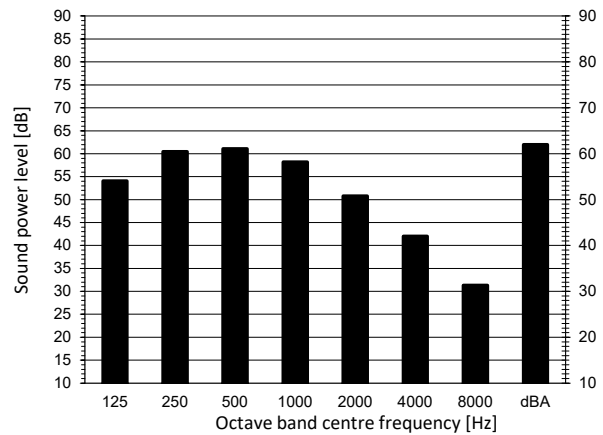

Fan speed: High

Notes

1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic power 0 dB = $\cdot 10E-6 \cdot \mu W$
3. Measured according to ISO 3744

4D142739


8 Sound data

8 - 1 Sound Power Spectrum


8

FTXP71N

Cooling mode

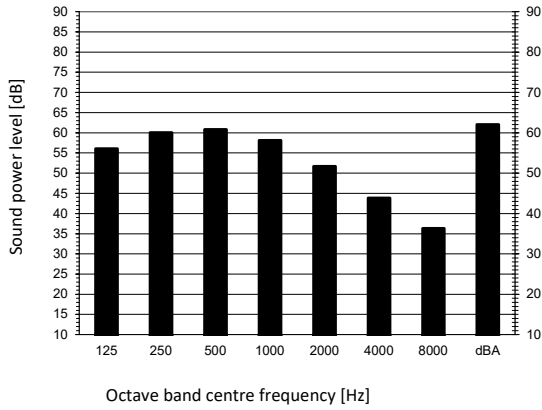

Heating mode

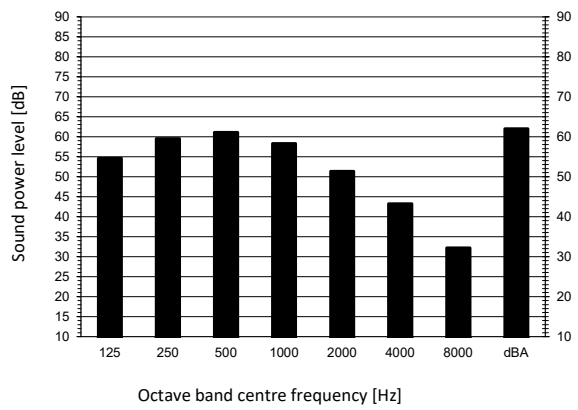

■ Fan speed: High

Notes

1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic power 0 dB = 10^{-6} W
3. Measured according to ISO 3744


4D142749

8 Sound data


8 - 2 Sound Pressure Spectrum

FTXP20N

Cooling mode

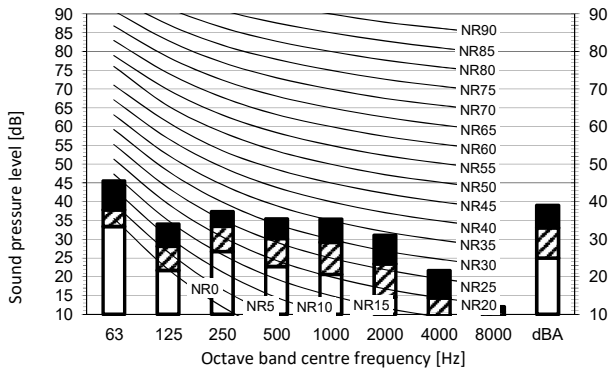

Heating mode

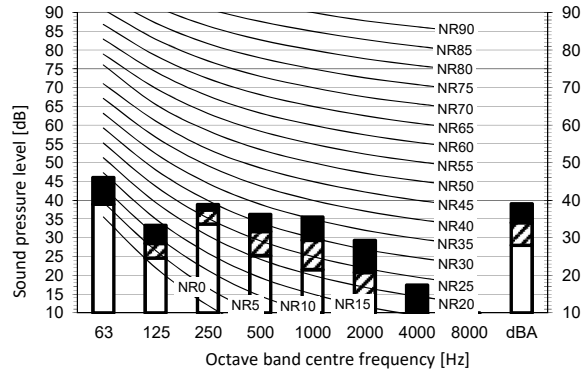


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale Fan speed
- B High
- C Medium
- D Low

Location of microphone



Cooling		Total dB	
A	B	C	D
dBA	39	33	25

Heating		Total dB	
A	B	C	D
dBA	39	34	28


Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber


3D121480

FTXP25N

Cooling mode

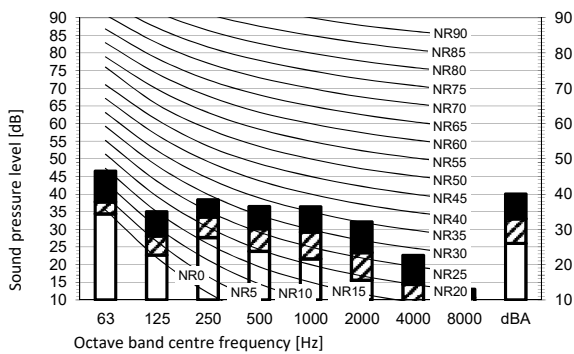

Heating mode

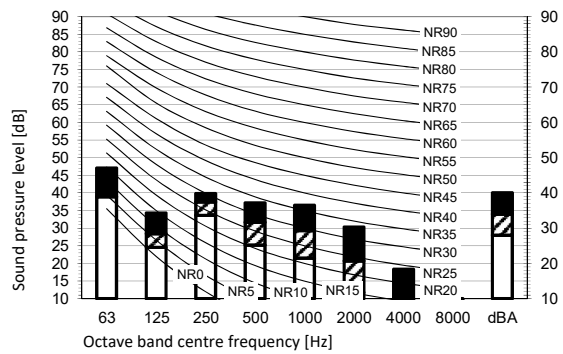


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale Fan speed
- B High
- C Medium
- D Low

Location of microphone



Cooling		Total dB	
A	B	C	D
dBA	40	33	26

Heating		Total dB	
A	B	C	D
dBA	40	34	28

Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber


3D121481

8 Sound data

8 - 2 Sound Pressure Spectrum

8

FTXP35N

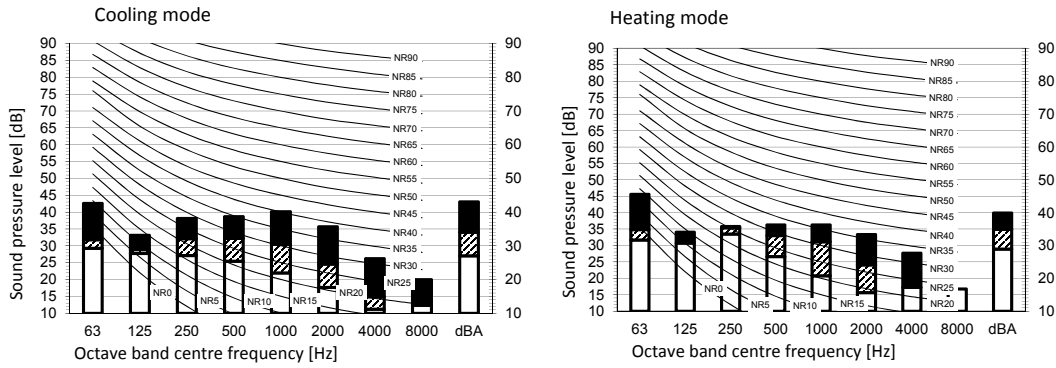

Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A	Scale	Fan speed
B	█	High
C	▨	Medium
D	□	Low


Cooling		Total dB	
A	B	C	D
dBA	43	34	27

Heating		Total dB	
A	B	C	D
dBA	40	35	29

Notes


1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

Location of microphone



3D108791A

FTXP50N

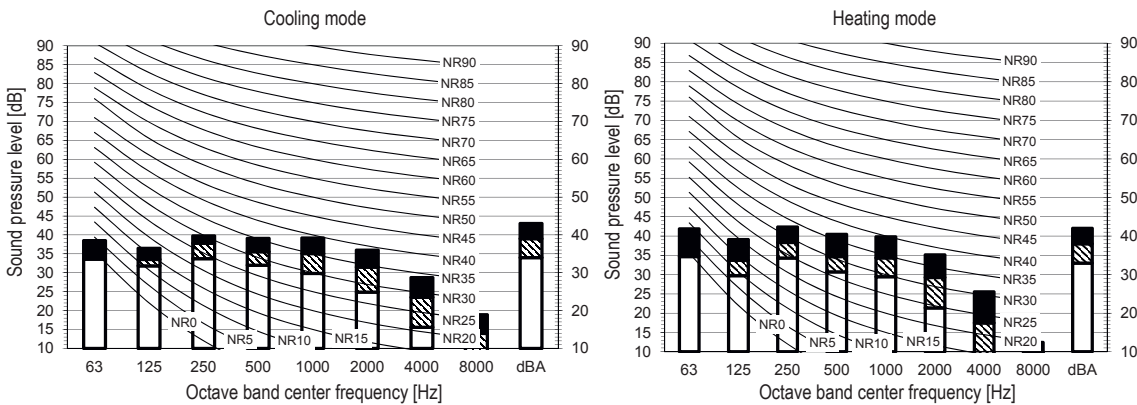


LEGEND

dBA = A-weighted sound pressure level (A scale according to IEC).

A	Scale	Fan speed
B	█	High
C	▨	Medium
D	□	Low

Location of microphone



Cooling		Total db	
A	B	C	D
dBA	43	39	34

Heating		Total dB	
A	B	C	D
dBA	42	38	33

NOTES



1. Operating conditions: power source 220-240 V · 50 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

3D108792B

8 Sound data

8 - 2 Sound Pressure Spectrum

FTXP60N

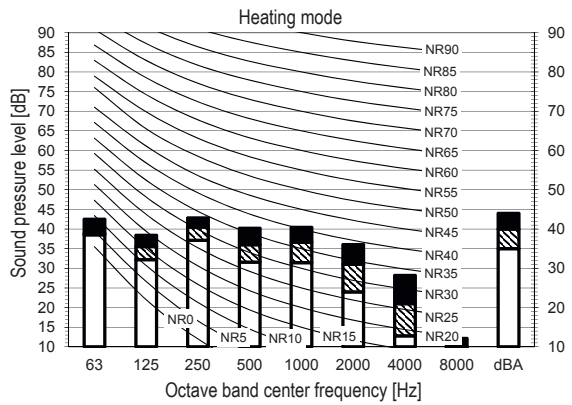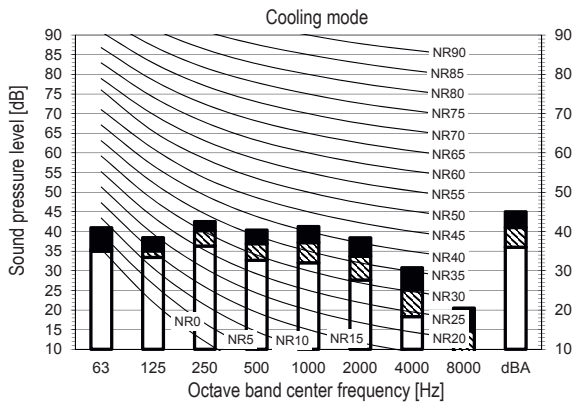


LEGEND

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High
- C Fan speed :Medium
- D Fan speed: Low

Location of microphone



Cooling Total db

A	B	C	D
dBA	45	41	36

Heating Total dB



A	B	C	D
dBA	44	40	35

NOTES

1. Operating conditions: power source 220-240 V 50Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

3D115179A

FTXP71N

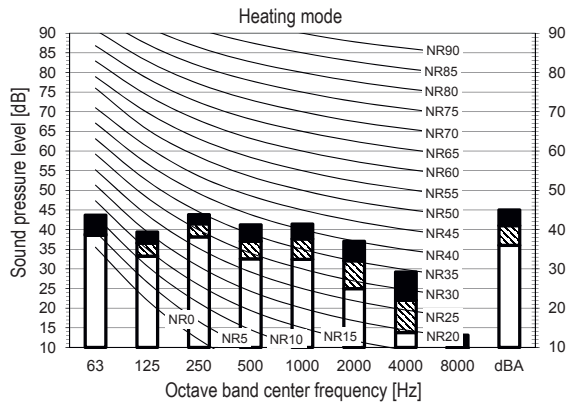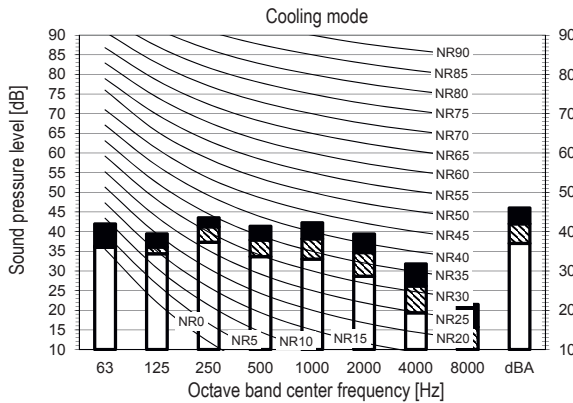


LEGEND

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High
- C Fan speed :Medium
- D Fan speed: Low

Location of microphone



Cooling Total db

A	B	C	D
dBA	46	42	37

Heating Total dB


A	B	C	D
dBA	45	41	36

NOTES

1. Operating conditions: power source 220-240 V 50 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

3D115180A

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

EEDEN23

01/2023



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.