



ESSENTIAL 2




SINGLE Split with hiwall indoor unit



WHY CHOOSE ESSENTIAL 2?

- ✓ Silent Mode
- ✓ Can operate in cooling mode even at low outdoor temperatures
- ✓ SINGLE Split/MULTI Split compatible

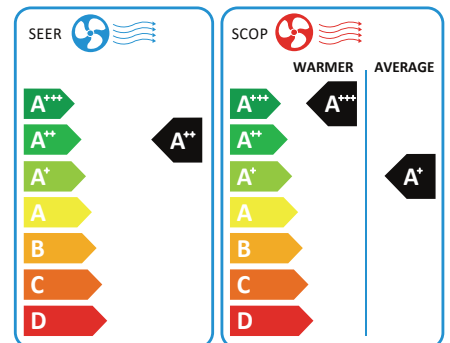

COMFORT

- Super Silent
- 12 Indoor Fan Speeds Levels
- Anti-cold air
- Multidirectional Airflow

RELIABILITY

- Self-diagnosis Function
- Emergency Function
- Opposite fan rotation

CONVENIENCE

- Single/Multi Compatible
- Auto restart

ENERGY SAVING

- 1W Standby
- Sleep

HEALTH

- High Density filter
- Cold Catalyst filter
- Self-Cleaning filter

ESSENTIAL 2 27M÷70M

SINGLE Split

Set			27M	35M	53M	70M
Cooling capacity	Standard (Min.~Max.)	Btu/h	9000 (3.500~11.000)	12.000 (4.700~14.700)	18.000 (11.570~20.000)	24.000 (7.200~28.000)
	Standard (Min.~Max.)	kW	2,64 (1,0~3,2)	3,52 (1,4~4,3)	5,27 (3,4~5,9)	7,03 (2,1~8,4)
Heating capacity	Standard (Min.~Max.)	Btu/h	10.000 (2.800~11.500)	13.000 (3.700~15.000)	19.000 (10.600~20.000)	25.000 (5.300~28.000)
	Standard (Min.~Max.)	kW	2,93 (0,8~3,4)	3,81 (1,1~4,4)	5,57 (3,1~5,8)	7,33 (1,6~8,2)
Seasonal efficiency ¹	Cooling	SEER	-	6,90	7,00	6,50
	Heating - Average season	SCOP	-	4,00	4,10	4,00
	Heating - Warmer season	SCOP	-	5,30	5,40	5,10

Indoor unit		IL3-XY	27M	35M	53M	70M
Code			87032258	87032253	87032255	89112248
Dimensions	Unit L x D x H	mm	722x187x290	802x189x297	965x215x319	1080x226x335

Outdoor unit		ML3-Y	27M	35M	53M	70M
Code			87032257	87032256	87032254	89112231
Dimensions	Unit L x D x H	mm	720x270x495	720x270x495	805x330x554	890x342x673

¹ SEER and SCOP data, relative energy ratings and annual energy consumption in conformity to the EN 14825 standard measurement.

SET



IL3-XY



ML3-Y



REMOTE CONTROL
RG10A4-D-BGEF

For more information
download the
Clivet Split
Product Guide



Your Clivet Sales Reference

