

Data sheet

Thermostatic Mixing Valve TVM-W

Description



- It is suitable for single outlets (e.g. baths, basins, showers and bidets) or small numbers of grouped outlets.
- Its robust and non-complex construction provides superior reliability, improved safety, energy efficiency and user comfort. If the cold supply fails, a total and fast flow shut-off results in greater safety for the end-user. Simplified design and construction, with fewer components, ensures superior reliability, longevity and safety.
- The TVM-W ensures a high level of protection from scalding, which is important especially in hospitals, schools or multi family houses (e.g. in case of legionella disinfections).
- TVM-W "Low lead brass" valves meet the new regulations enforced by the European Drinking Water Directive that comes into effect in December 2013.

The TVM-W is a self-acting mixing valve, which provides mixed water at a constant temperature. It is used for instant supply of water at a required temperature in domestic hot water applications.

- The quick reaction of the thermostatic elements ensures accurate temperature control.

Main data:

- Setting temperature in the range 35 ... 70 °C
- Preset and locked at 50 °C
- Locking function locks the set temperature
- DN 20 and DN 25
- Shuts off flow if the hot or cold supply fails
- Maintains the temperature by varying supply conditions
- integrated non-return valves

Ordering

Type	DN	Connection	Temp. range (°C)	E (l/min)	k _{vs} ¹⁾	Code No.
TVM-W	20	G 1	35 ... 70	35	2.1	003Z3145
	25	G 1¼	35 ... 70	55	3.3	003Z3146

E = extracted (outlet) quantity at Δp = 1.0 bar
¹⁾ with check valve

Accessories and spare parts

Type	Max. pressure (bar)	Max. temperature (°C)	Code No.
Non-return valve DN 20	10	90	003Z3137
Non-return valve DN 25	10	90	003Z3138
Thermostatic element			003Z3139
Fitting set DN 20			003Z3134
Fitting set DN 25			003Z3135

Technical data



Factory temperature presetting	°C	50
Cold water supply temperature		10
Hot water supply temperature		70
Temperature stability (depend on pressure and temperature) ³⁾		± 3
Max. hot water temperature	bar	90 ¹⁾
Max. operating pressure		10
Min. operating pressure		0.5
Max. inlet pressure diferential ²⁾		2
Supply pressure, (dynamic)		5
Materials		
Body	CW626N (Low Lead brass) + antilimescale treatment	
Plastic cap	Polystyrene	
Spring	SS steel 1.4301 (inoydable)	
Sealing	EPDM	

¹⁾ 100 °C without Non-return valve


²⁾ Between cold and worm inlets

³⁾ Cold inlet water temperature should not be above 15°C

Applications

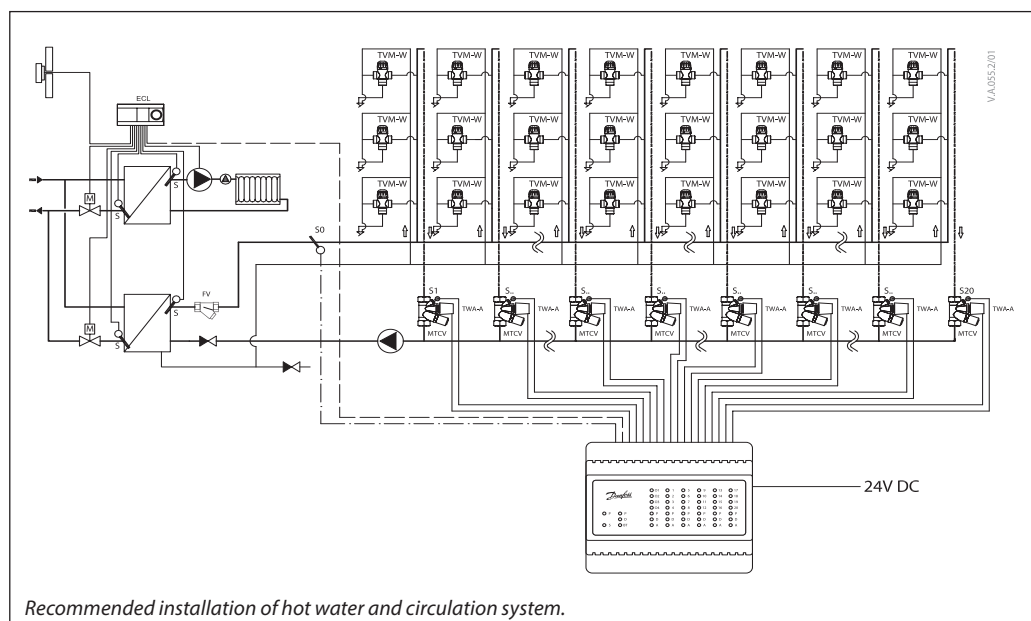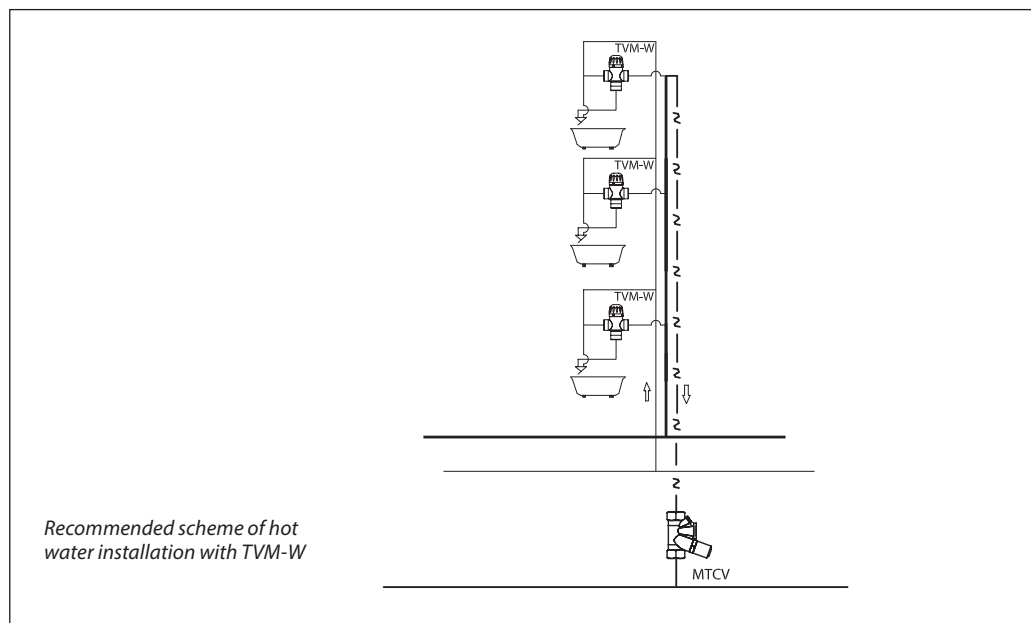

Pressure diagram

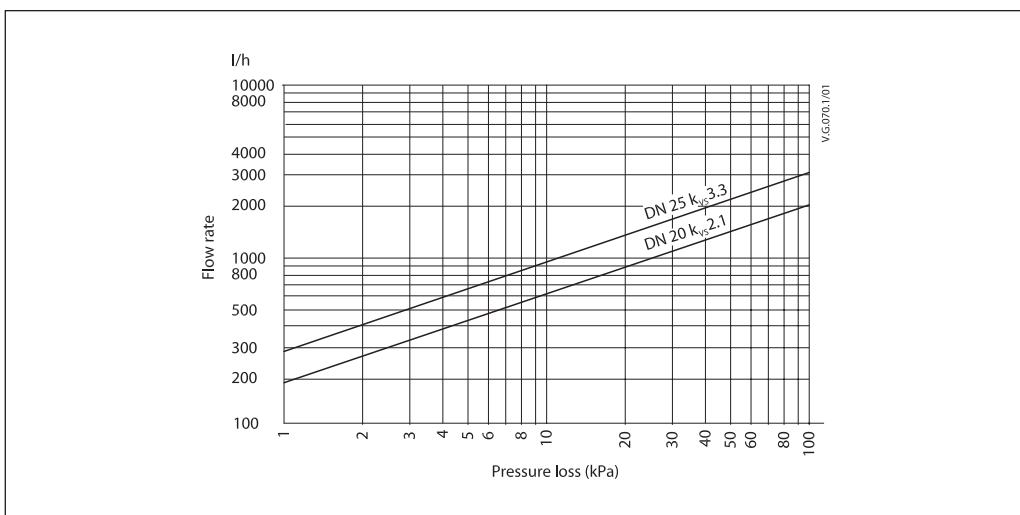


Installation

By mixing hot and cold water to achieve the desired temperature, the valve effectively provides a greater volume of hot water from the given tank size.

High temperature water storage prevents the growth of legionella bacteria.


The valve can be installed in any position into the riser:

- In situations where the hot pressure may exceed the cold pressure and on pumped systems, non-return valves must be fitted to both hot and cold inlets.
- A TVM-W will provide optimum performance when installed with hot and cold supplies of equal dynamic pressure, i.e. pressure under flow conditions.
- In order to ensure the correct function of the failsafe and optimum performance it is recommended that the hot supply temperature is at least 10 °C higher than the set temperature.

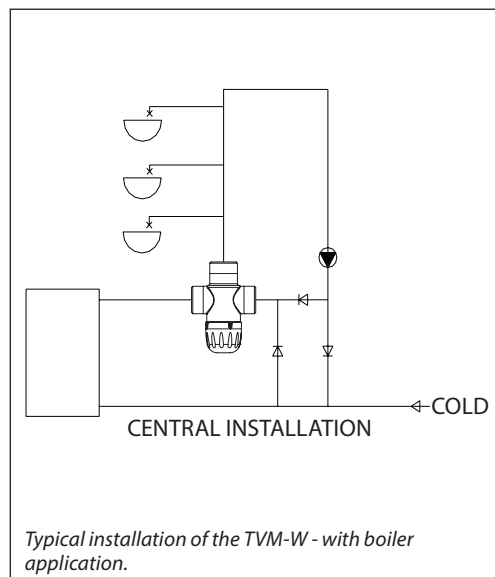

Spare parts


1. Non-return valve
2. Fitting set
3. Thermostatic element

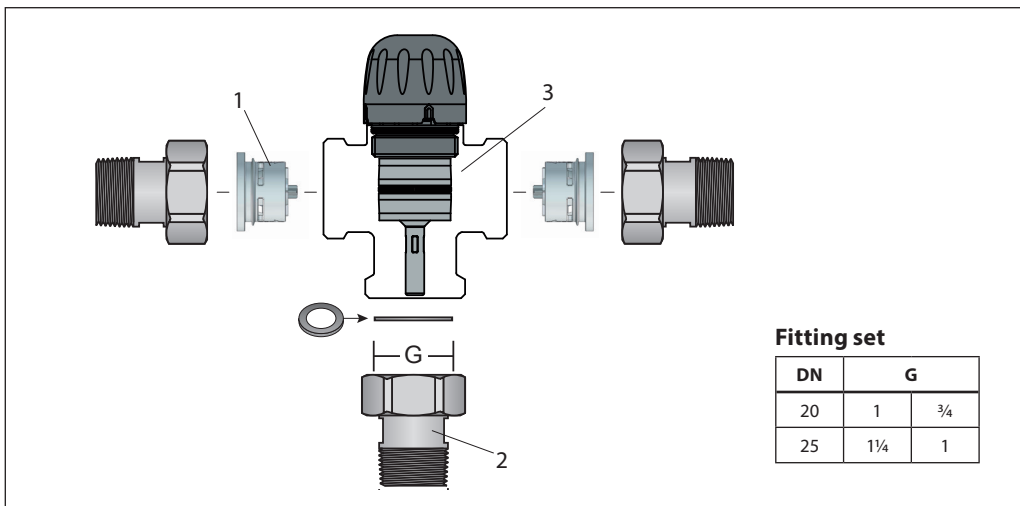


Data sheet

Thermostatic Mixing Valve TVM-W

Locking the presetting

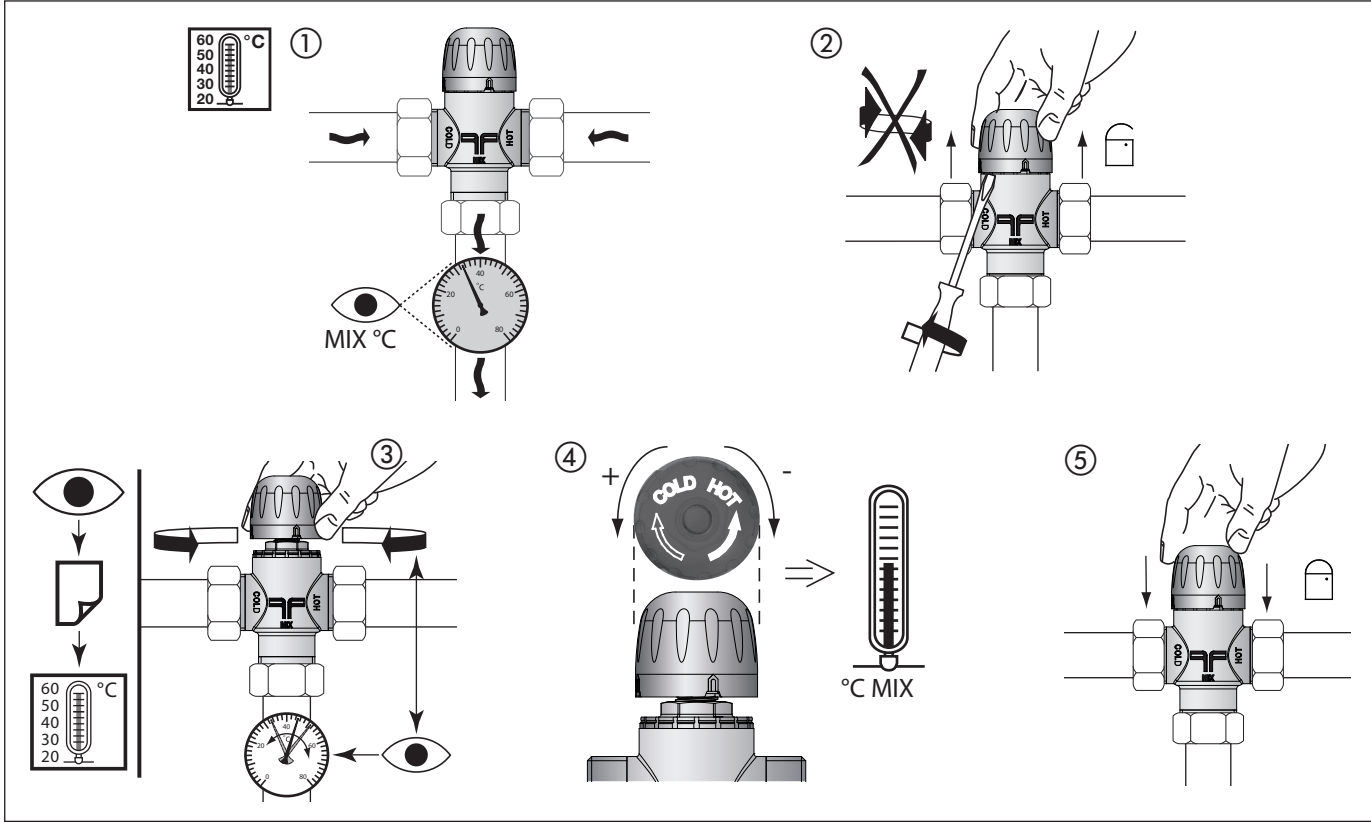

Dimensions

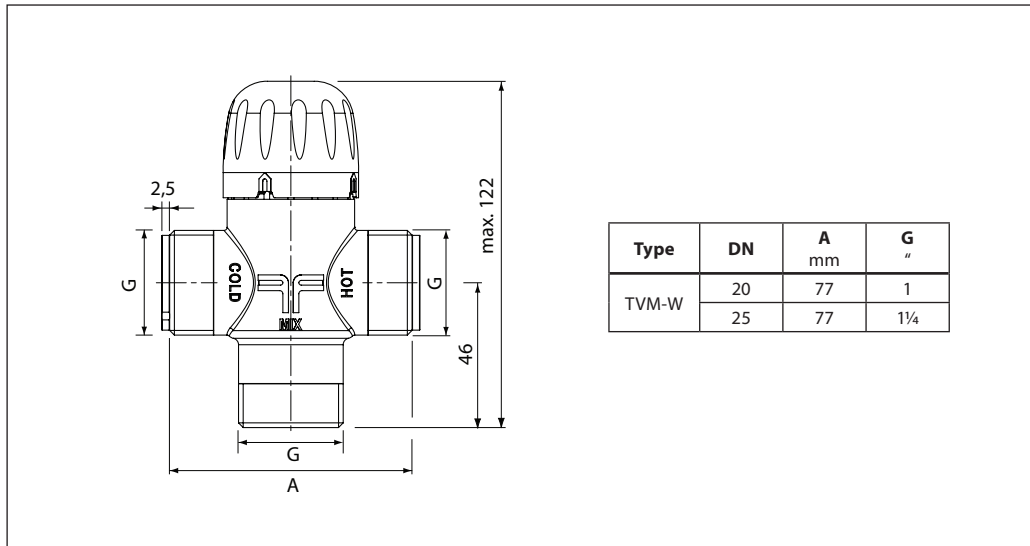

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.