




ENERG

енергия · ενεργεια







HITACHI

RAS-6WHNPE / RWM-6.0N1E / Integrated controller




- 
- 
- 
- 

This label is edited by Hitachi's

The space heating function (55°C: for PAC other than low temperature)


The system is composed of the combination of a Heat Pump and

Thermal solar panels


A storage tank

Temperature control systems


A supplementary space heating system boiler type

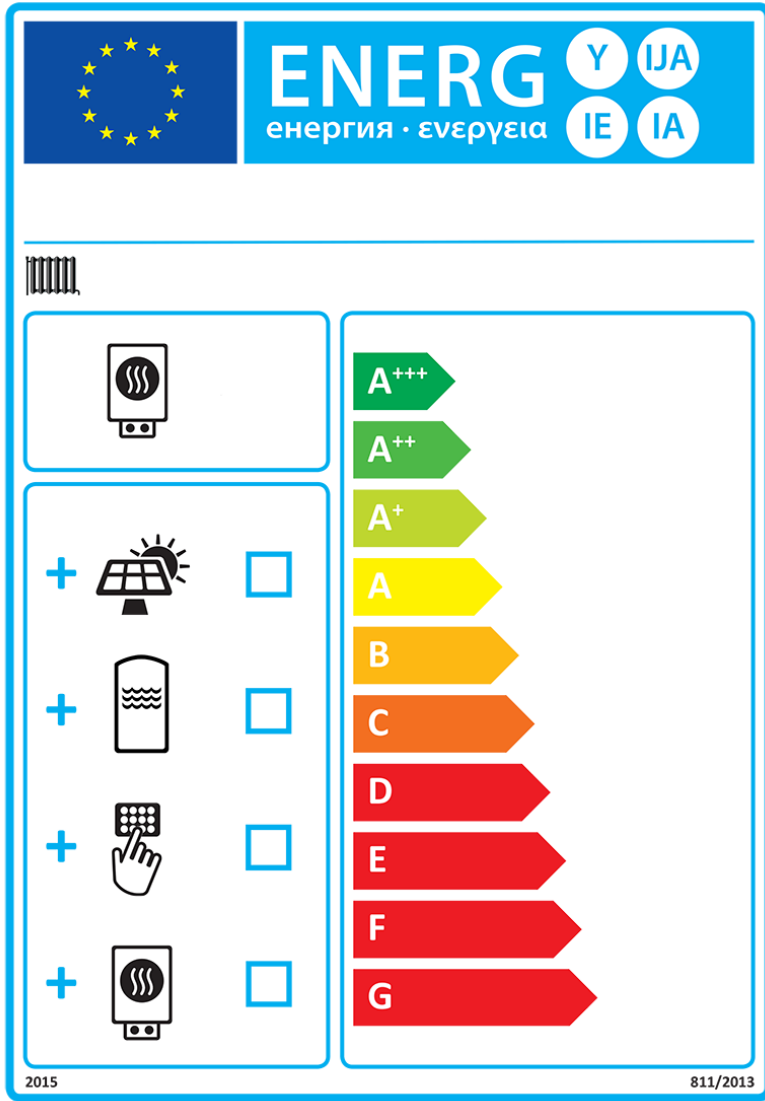

The seasonal space heating energy efficiency class of the package of combination heater, temperature control and solar device.

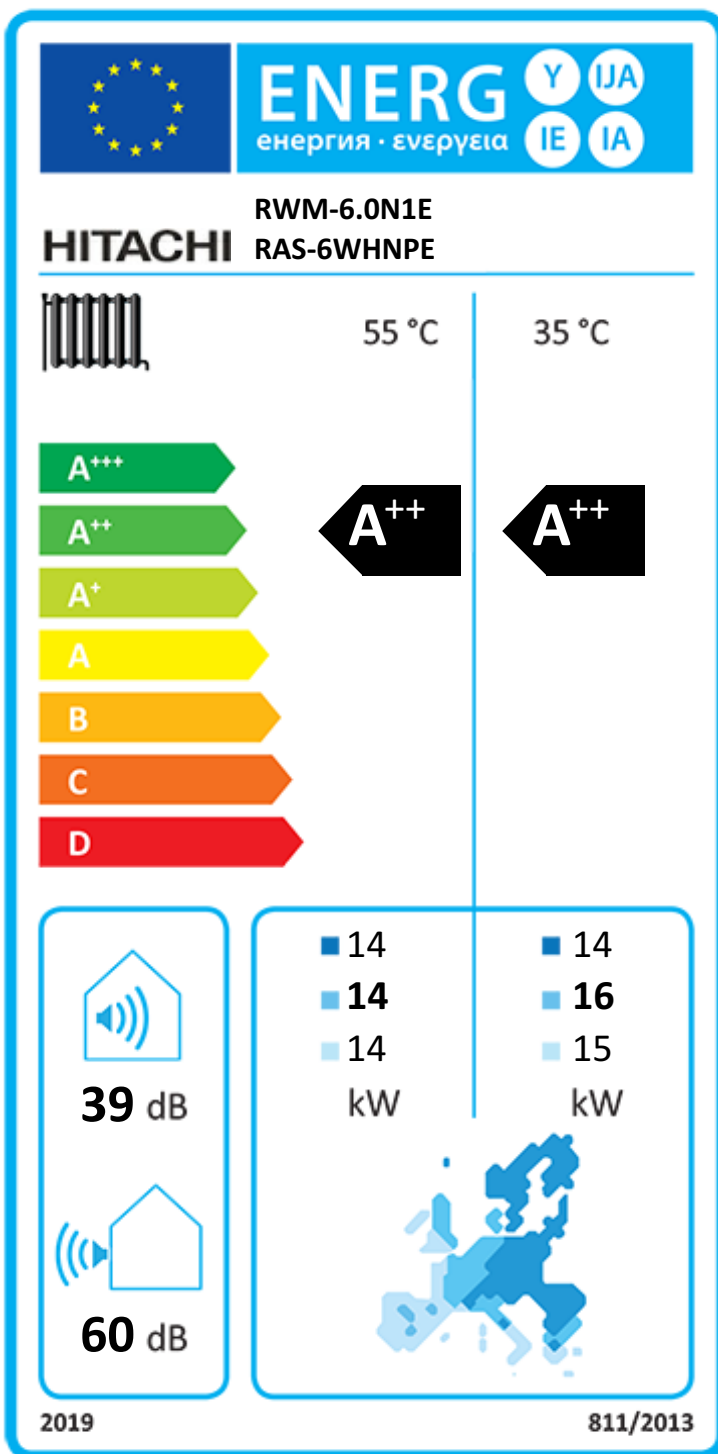

This label is edited by Hitachi's "ErP Active Tool", Ecodesign implementation, in accordance with Annex II and III of European Regulation (EU) No 811/2013 of 18 February 2013.

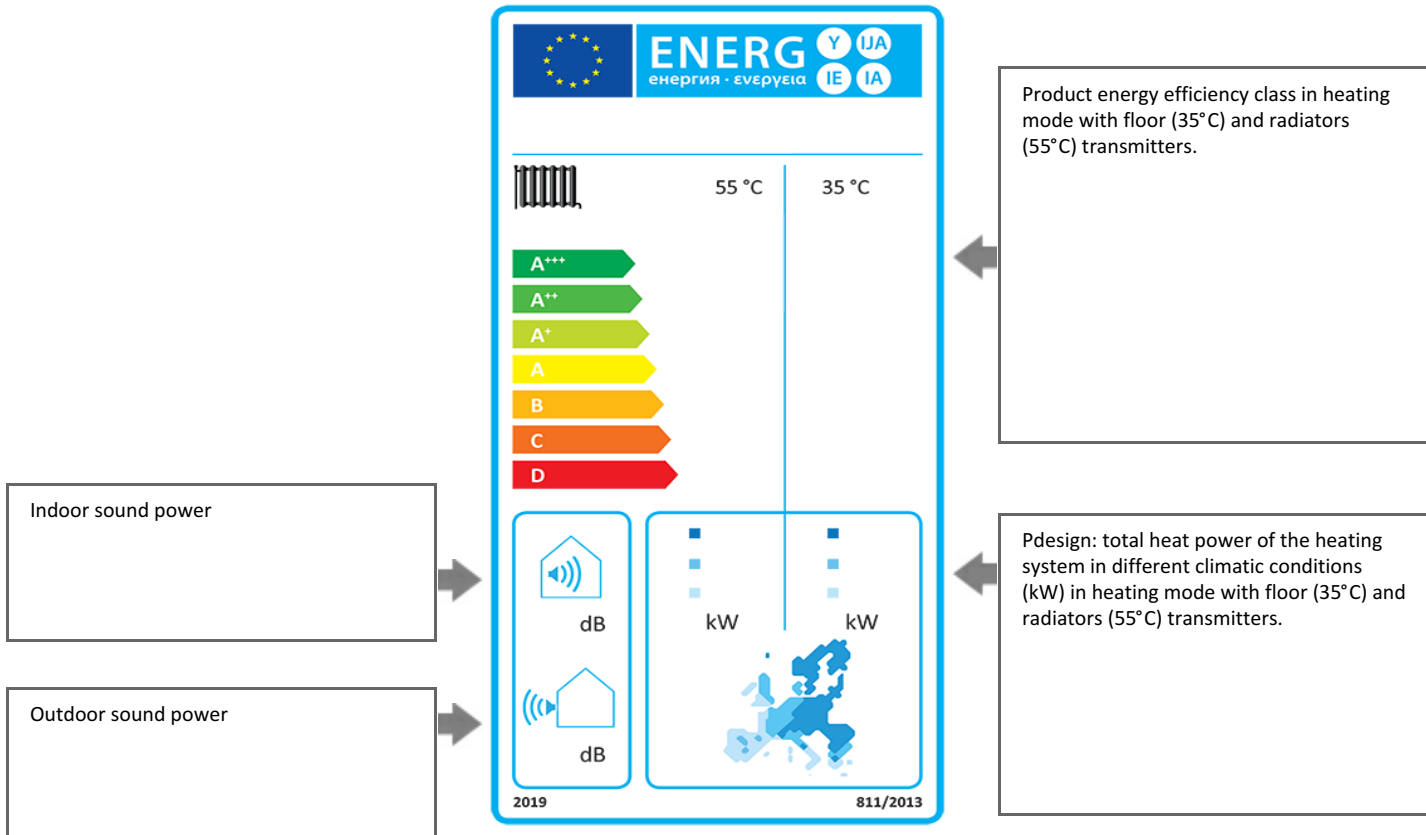

European regulatory climate	Warm	Average	Cold
Outdoor temperature (T design-C°)	+2°C	-10°C	-22°C

The regulation 811/2013 requires the use of the 2015 label until 25/09/2019; For HITACHI most efficient products, showing an energy efficiency class higher than the maximum class displayed on the allowed label, please refer to the document named "Fiche".