

## ■ Bell Transformers and Modular Power Supplies



BZ326578-A

### ■ Schrack-Info

- Modular power supplies, bell- and safety isolated transformers for panels

## ■ Modular bell transformers




BZ326578-A

### ■ Schrack-Info


- Bell-transformer
- Secondary voltage 4V, 8V, 12V and 24V 50Hz
- Rated output 15VA or 30VA
- PTC included for protection

Type:	BZ326577-A	BZ326578-A
Nominal Power	15VA	30VA
Standards	EN 61558-1, EN 61558-2-8	
Primary Nominal Voltage	230V-AC	
Secondary voltage / current 1	4V-AC / 1,25A	12V-AC / 1,25A
Secondary voltage / current 2	8V-AC / 1,25A	12V-AC / 1,25A
Secondary voltage / current 3	12V-AC / 1,25A	24V-AC / 1,25A
Rated frequency	50/60 Hz	
Protection class	2	
Degree of protection	IP20	

## ■ BZ326577-A Dimensions

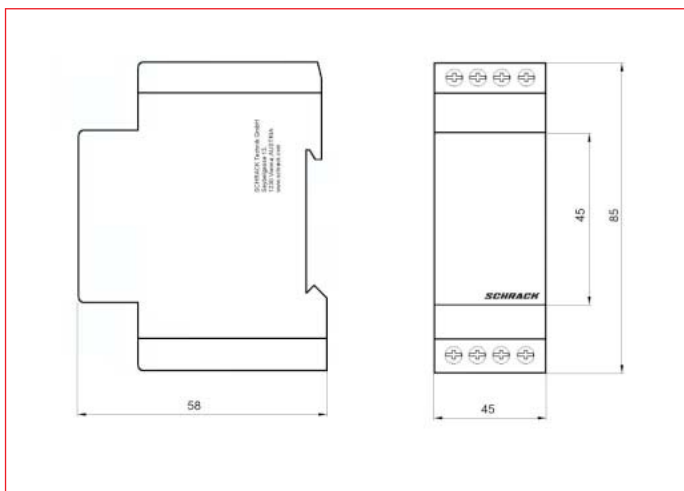


## ■ BZ326577-A Wiring diagram

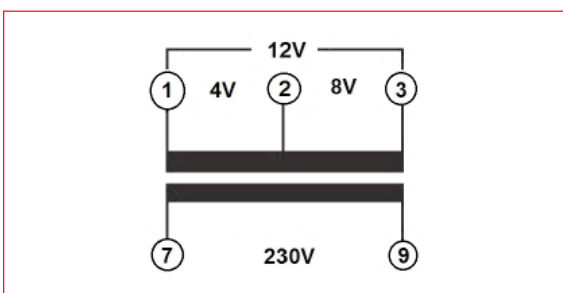




Modular bell transformers

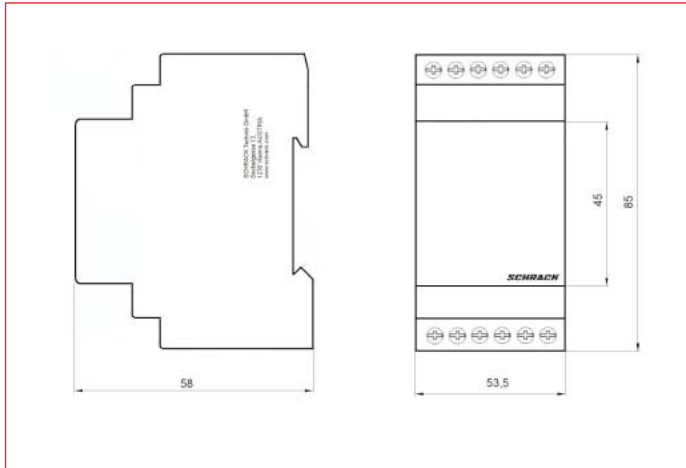BZ326578-A Dimensions

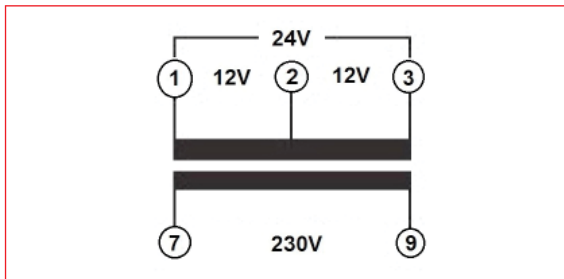

BZ326578-A Wiring diagram



DESCRIPTION	AVAILABLE	ORDER NO.
230VAC - 4/8/12VAC sek., 15VA		<b>BZ326577-A</b>
230VAC - 12/12/12VAC sek., 30VA		<b>BZ326578-A</b>